
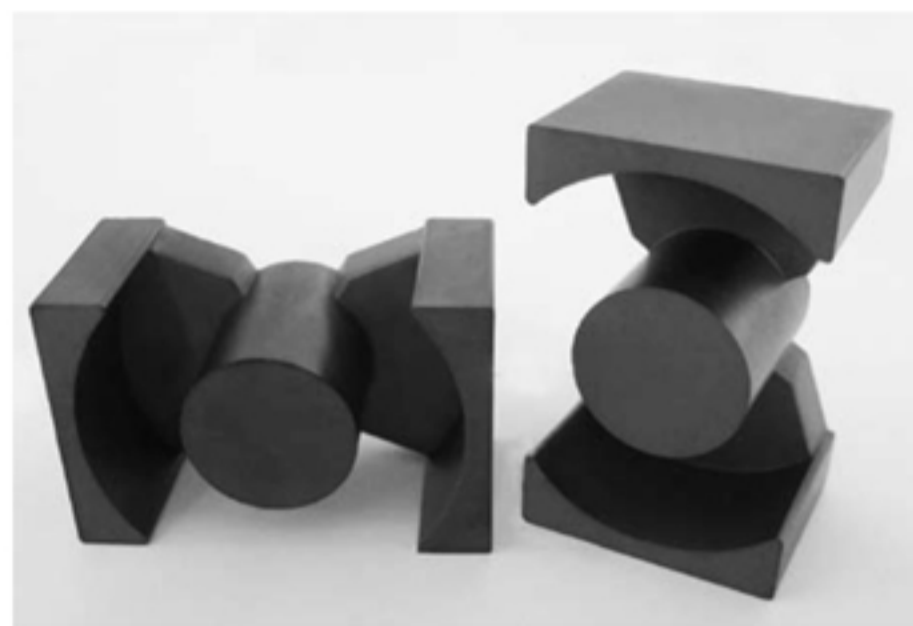


Soft ferrite cores 软磁铁氧体

PQ型磁芯

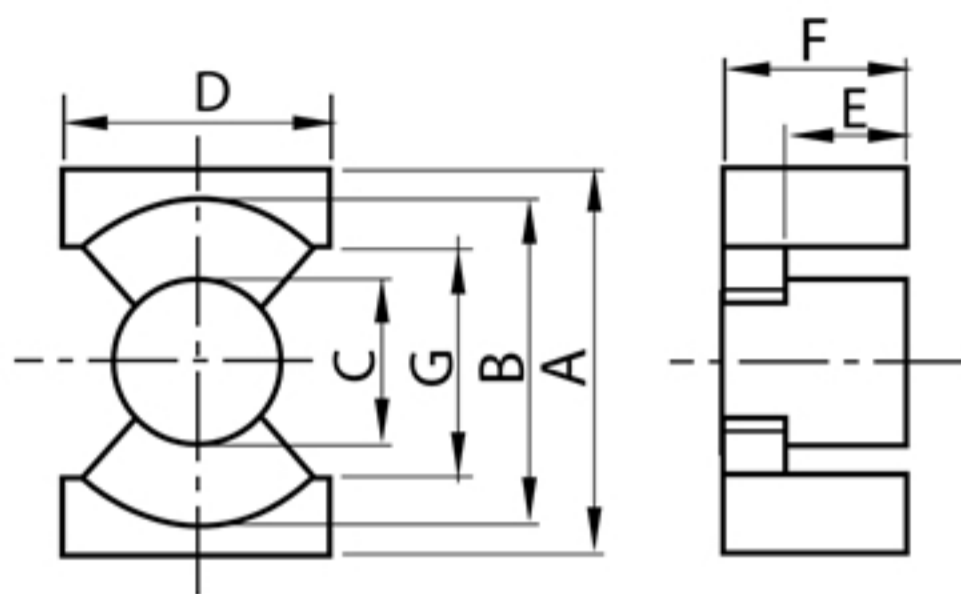

软磁铁氧体

适用材料R2KB、R2KB1

型号	尺寸						
	A (mm)	B (mm)	C _{max} (mm)	D (mm)	E _{min} (mm)	F (mm)	G _{min} (mm)
PQ20/16	20.5 _{±0.4}	18 _{±0.4}	9.0	14 _{±0.4}	5.0	8.2 _{-0.2}	12
PQ20/20	20.5 _{±0.4}	18 _{±0.4}	9.0	14 _{±0.4}	7.0	10.2 _{-0.2}	12
PQ26/20	26.5 _{±0.45}	22.5 _{±0.45}	12.2	19 _{±0.45}	5.6	10.2 _{-0.25}	15.5
PQ26/25	26.5 _{±0.45}	22.5 _{±0.45}	12.2	19 _{±0.45}	7.9	12.5 _{-0.25}	15.5
PQ32/20	32 _{±0.5}	27.5 _{±0.5}	13.7	22 _{±0.5}	5.6	10.4 _{-0.25}	19
PQ32/30	32 _{±0.5}	27.5 _{±0.5}	13.7	22 _{±0.5}	10.5	15.3 _{-0.25}	19
PQ35/35	35 _{±0.5}	32 _{±0.5}	14.6	26 _{±0.5}	12.5	17.5 _{-0.25}	23.5
PQ40/40	40 ^{+1.4} _{-0.4}	37 _{±0.6}	15.2	28 _{±0.5}	14.6	20 _{-0.25}	27.5
PQ50/50	50 _{±0.7}	44 _{±0.7}	20.3	32 _{±0.6}	17.9	25 _{-0.25}	31.5

型号	C1 (mm ⁻¹)	A _e (mm ²)	L _e (mm)	V _e (mm ³)	W (g)	A _l (nH/N ²) (±25%)
PQ20/16	0.605	62.0	37.4	2310	13	3880
PQ20/20	0.738	62.0	45.4	2790	15	3310
PQ26/20	0.391	119	46.3	5490	31	6170
PQ26/25	0.472	118	55.5	6530	36	5250
PQ32/20	0.326	170	55.5	9420	42	7310
PQ32/30	0.464	161	74.6	12000	55	5140
PQ35/35	0.448	196	87.9	17300	73	4860
PQ40/40	0.508	201	102	20500	95	4300
PQ50/50	0.346	328	113	37200	195	6720